


DUCK BILL GROUNDING CLAMPS

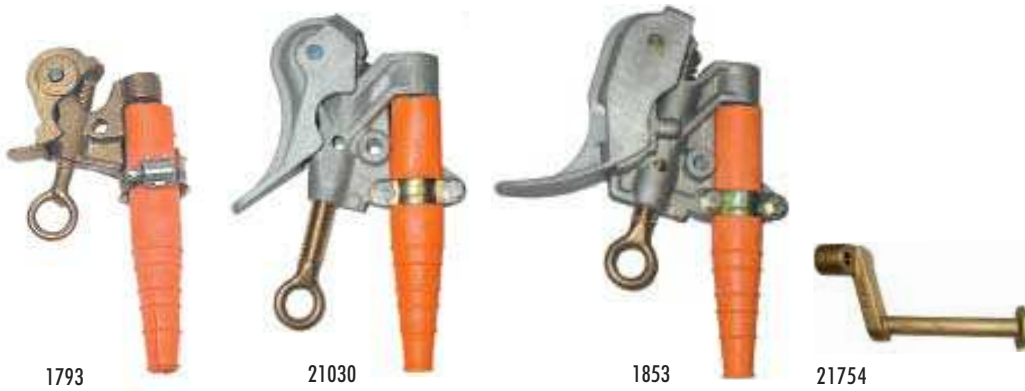

21081 - Stick Mounted Duck Bill Clamp

Cat. No. & Description		Class / ASTM Grade	Main Line Range	Continuous Current Rating	Weight ea. lbs. (kgs)	
B R O N Z E	556 KCM SMOOTH JAW BRONZE DUCK BILL --Gravity Actuated - "V" Thread					
	1793 Eye	4 / A Smooth Jaw	556 MCM ACSR to #6	350 RMS Amps 60 Hz	1.3 (.6)	
	w/ strain relief sleeve					
	21080 Eye					
	w/o strain relief sleeve					
	1797* Mounted					
	w/ strain relief sleeve					
	2093 Hanger Stud only				.4 (.1)	
	A L U M I N U M	1.1" SMOOTH JAW ALUMINUM DUCK BILL --Spring Loaded - "V" Thread				
		21030 Eye	5 / A Smooth Jaw	795 KCM ACSR to #6	400 RMS Amps 60 Hz	1.1 (.5)
w/ strain relief sleeve						
21059 Eye						
w/o strain relief sleeve						
21081* Mounted						
w/ strain relief sleeve						
21754 Hanger Stud only					.3 (.1)	
A L U M I N U M		1.66" SERRATED JAW ALUMINUM DUCK BILL --Spring Loaded - "V" Thread				
		1853 Eye	5 / B Serrated Jaw	1590 MCM ACSR to #6	400 RMS Amps 60 Hz	1.5 (.7)
	w/ strain relief sleeve					
	2553 Eye					
	w/o strain relief sleeve					
	1855* Mounted					
	w/ strain relief sleeve					
21754 Hanger Stud only						

*Mounted: 1.25" dia x 6' Fiberglass Hot Stick permanently mounted