


GROUNDING CLAMPS FOR FLATS & ANGLES

The **Heavy Duty Bronze “C” Type Flat Jaw Clamp** with anti-blow off keeper is made to fit structural angles, flats, and copper or copperweld stranded grounding assemblies. To install, first use an abrasive cloth or wire brush to clean the surface to be clamped. Then, wipe the surface clean, position the clamp, finger tighten and set the screws. Use a wrench to secure and tighten. A 2667 clamp with contact stud offers greater versatility.

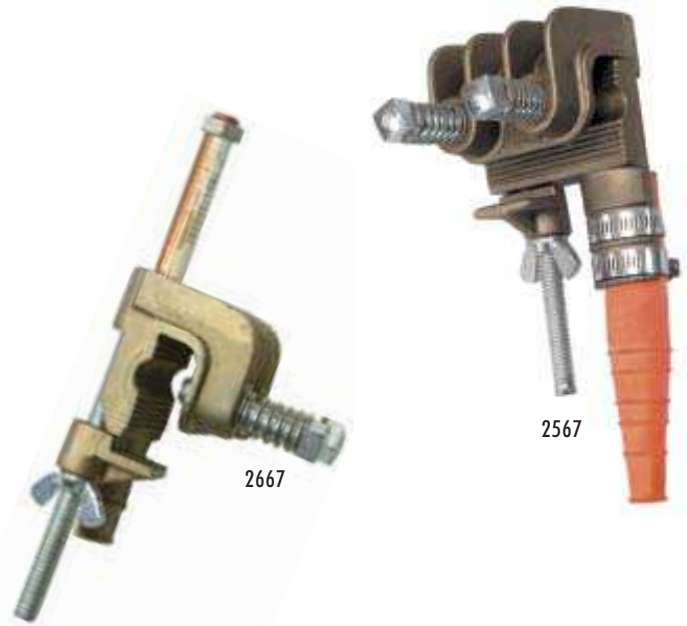

Cat. No. & Description	Class / ASTM Grade	Main Line Range	Tap Size	Weight ea. lbs. (kgs)
2567 w/ Strain Relief Sleeve 5/8"-11NC Connection	5 / B Serrated Jaw	Angles & Flats: 2.5"-4" WX (64-101 x 3-19mm) Rounds: .25"-.75" (6-19mm) Dia.	5/8-11UNC Max. Cable Size 4/0 Type V Compression Ferrules	4 (1.8)
2577 w/ Strain Relief Sleeve 3/4"-10NC Connection	6 / B Serrated Jaw	Angles & Flats: 2.5"-4" WX (64-101x3-19mm) Rounds: .25"-.75" (6-19mm) Dia.	3/4-10UNC Max. Cable Size 250 MCM Type V Compression Ferrules	4 (1.8)
2667 2567 Clamp w/ Contact Stud	5 / B Serrated Jaw			5 (2.3)