

GUY WIRE ROBOREELS


Assembly & Instructions

Cat. No. 5276

Cat. No. 5415



Brake System Is Tightened For Shipping Only. Brake Pressure Must Be Reduced For Proper Operation. To Reduce Turn Adjustment Nut On Back Of Unit Clockwise




Adjustment Nut

Mount coil guides on **inside** of adjustable bracket.

Coil guides can be moved up or down to accommodate coil sizes.

Adjustable Bracket

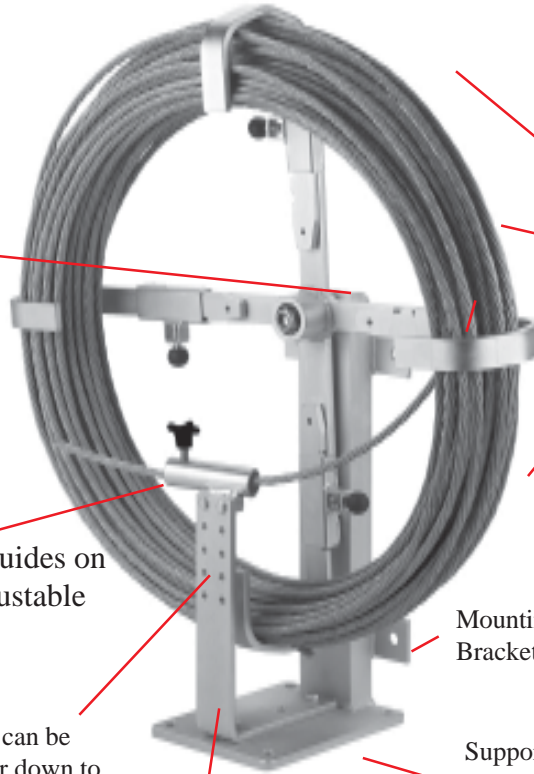

Four Adjustable Arms

Adjust to coil diameters.

Mounting Bracket

Support & Mounting Plate



- 1) Prior to loading coil into reel, band coil together at both ends and and tape ends.
- 2) Adjust **bottom** arms to proper coil size.
- 3) Roll coil into bottom arms, secure upper arms on coil applying downward force, and cut banding around coil.
- 4) Pull coil through guide.



**Make sure reel is properly mounted and secured to vehicle before transporting unit. Use all mounting holes.*



800-874-4702: 419-331-0371

www.aircraftdynamics.com