




20005MFMH shown with extension handle

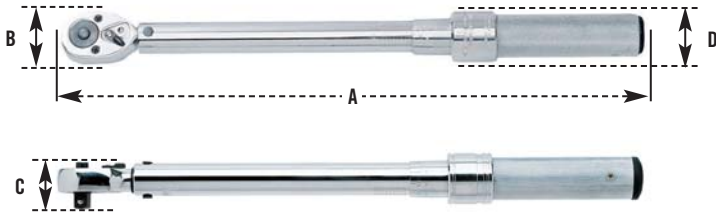

MICRO-ADJUSTABLE Metal Handle English Scale

The metal handle series offers the user a rugged, industrial strength torque wrench able to withstand the rigors of professional use. Handles are lightly knurled for a tough, non-slip grip. There are 34 models of metal handle micrometer adjustable torque wrenches available.



FEATURES:

- Dual scale, Calibrated dual direction
- Positive Lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read Laser marked scales
- Most feature Quick Release buttons which provide good socket retention as well as easy socket removal
- Accuracy: $\pm 4\%$ clockwise $\pm 6\%$ CCW of indicated value, CW, from 20% to 100% of full scale
- Meets or exceeds ASME B107.14M-1994, ISO 6789 Standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.

Part Number	Torque Range	Sq. Dr.	Incr.	A In. (mm)	B In. (mm)	C In. (mm)	D In. (mm)	Wt. Lbs. (Kg)
INCH POUND								
501MRMH	10-50 in. lb.	1/4"	1	10.15 (257.80)	1.06 (26.92)	0.93 (23.62)	1.06 (26.92)	0.85 (.38)
1501MRMH	20-150 in. lb.	1/4"	1	10.15 (257.80)	1.06 (26.92)	0.93 (23.62)	1.06 (26.92)	0.90 (.40)
1502MRMH	20-150 in. lb.	3/8"	1	10.15 (257.80)	1.06 (26.92)	0.93 (23.62)	1.06 (26.92)	0.90 (.40)
2002MRMH	30-200 in. lb.	3/8"	1	10.15 (257.80)	1.06 (26.92)	0.93 (23.62)	1.06 (26.92)	0.85 (.38)
2502MRMH	30-250 in. lb.	3/8"	1	11.25 (285.75)	1.06 (26.92)	0.93 (23.62)	1.06 (26.92)	0.95 (.43)
7502MRMH	100-750 in. lb.	3/8"	5	16.00 (406.40)	1.43 (36.32)	1.20 (30.48)	1.40 (35.56)	2.50 (1.13)
10002MRMH	150-1000 in. lb.	3/8"	5	16.00 (406.40)	1.43 (36.32)	1.20 (30.48)	1.40 (35.56)	2.50 (1.13)
25003MRMH	300-2500 in. lb.	1/2"	10	18.00 (457.20)	1.70 (43.18)	1.40 (35.56)	1.40 (35.56)	3.20 (1.45)
FOOT POUND								
752MFRMH	5-75 ft. lb.	3/8"	0.5	16.00 (406.40)	1.43 (36.32)	1.20 (30.48)	1.40 (35.56)	2.50 (1.13)
1002MFRMH	10-100 ft. lb.	3/8"	0.5	16.00 (406.40)	1.43 (36.32)	1.20 (30.48)	1.40 (35.56)	2.55 (1.15)
1503MFRMH	20-150 ft. lb.	1/2"	1	19.00 (482.70)	1.70 (43.18)	1.40 (35.56)	1.40 (35.56)	3.15 (1.42)
2503MFRMH	30-250 ft. lb.	1/2"	1	24.40 (619.76)	1.70 (43.18)	1.40 (35.56)	1.40 (35.56)	3.15 (1.42)
4004MFRMH	80-400 ft. lb.	3/4"	5	34.25 (870.00)	2.50 (63.50)	2.10 (53.34)	1.40 (35.56)	10.30 (4.67)
6004MFRMH	100-600 ft. lb.	3/4"	5	42.00 (1066.80)	2.50 (63.50)	2.00 (50.80)	1.15 (27.21)	11.85 (5.37)
10005MFRMH*	200-1000 ft. lb.	1"	5	70.00 (1778.00)	3.00 (76.20)	3.00 (76.20)	1.50 (38.10)	25.10 (11.38)
20005MFMH**	300-2000 ft. lb.	1"	10	108.50 (2755.90)	3.15 (80.01)	4.25 (107.95)	1.65 (41.91)	48.75 (22.11)

* NOTE: 10005MFRMH supplied with one extension handle and is packed in a metal box.

**NOTE: 20005MFMH supplied with two extension handles, fixed/non-ratcheted head and is packed in a sturdy cardboard box.